

REEL TAPING SPECIFICATIONS FOR SURFACE MOUNT DEVICES-LL-34

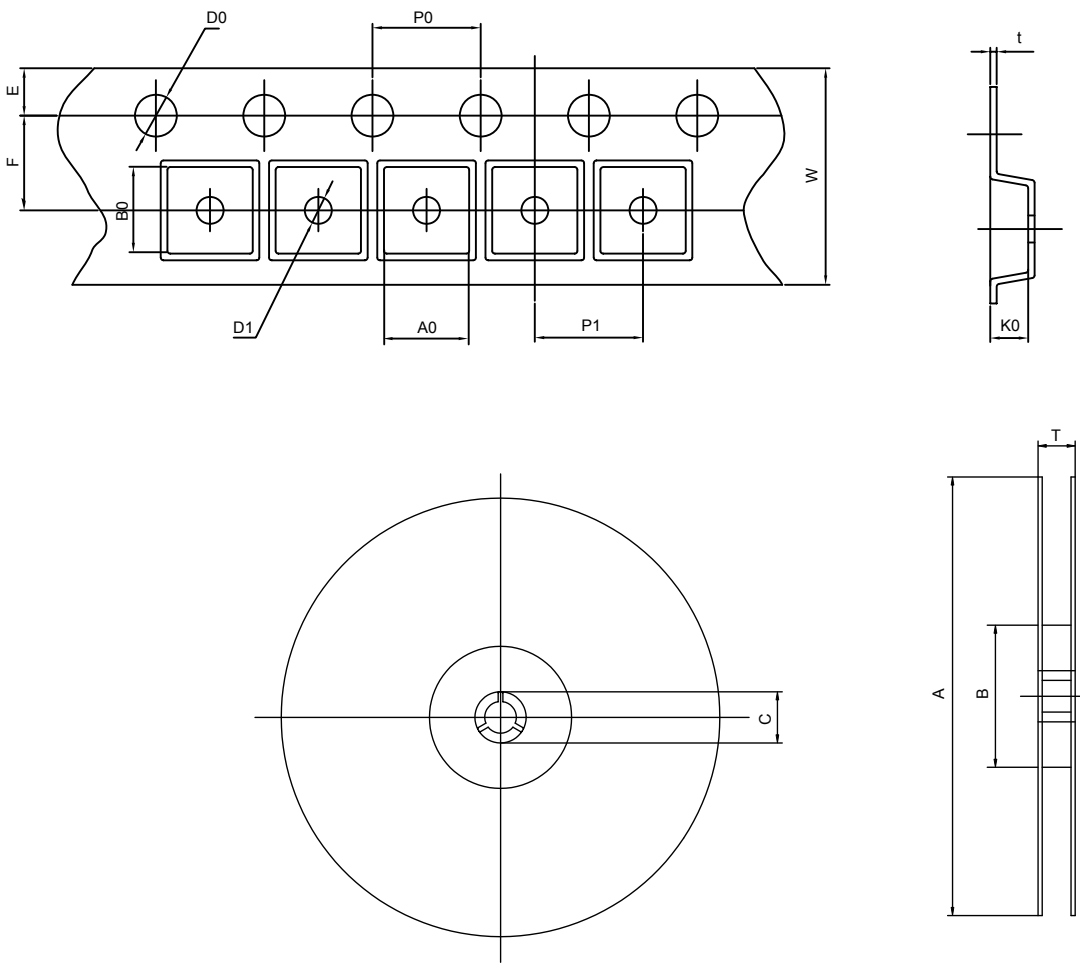


Fig.: Configuration of LL-34 TAPING

ITEM	SYMBOL	SPECIFICATIONS (mm)	SPECIFICATIONS (inch)	
Carrier width	A0	1.8 Max.	0.071 Max.	
Carrier length	B0	3.83 Max.	0.151 Max.	
Carrier depth	K0	1.78 Max.	0.070 Max.	
Sprocket hole	D0	1.5±0.10	0.059±0.004	
Reel outside diameter	A	7 inch	178	7.009
		13 inch	330	12.994
Reel inner diameter	B	7 inch	55	2.166
		13 inch	100	3.938
Feed hole diameter	C	20.2 Min.	0.795 Min.	
Strocket hole position	E	1.75±0.10	0.069±0.004	
Punch hole position	F	3.5 ±0.05	0.138±0.002	
Punch hole pitch	P1	4.0±0.10	0.158±0.004	
Sprocket hole pitch	P0	4.0±0.10	0.158±0.004	
Overall tape thickness	t	0.28 Max.	0.011 Max.	
Tape width	W	8.0±0.30	0.315±0.012	
Reel width	T	14.4	0.567 Max.	
Punch hole diameter	D1	1.0±0.25	0.039±0.010	

Note : Devices are packed in accordance with EIA standard RS-481-A and specification given above. Available only for LL-34 devices.