

## Ultra Low Capacitance TVS/ESD Protection Diode

### DESCRIPTION

TEP0501SALC is an ultra-low capacitance Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for high-speed data interfaces. With typical capacitance of 0.25pF only, TEP0501SALC is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD), Level 4 ( $\pm 15\text{kV}$  air,  $\pm 8\text{kV}$  contact discharge), IEC 61000-4-4 (electrical fast transient - EFT) (40A, 5/50 ns), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

TEP0501SALC uses ultra-small DFN0603 package. Each TEP0501SALC device can protect one high-speed data line. It offers system designers flexibility to protect single data line where space is a premium concern. The combined features of low capacitance, ultra-small size and high ESD robustness make TEP0501SALC ideal for high-speed data port and high-frequency line (e.g., USB 2.0 & antenna line) applications, such as cellular phones and HD visual devices.

### ORDERING INFORMATION

- ✧ Device: TEP0501SALC
- ✧ Package: DFN0603
- ✧ Marking: Marking Code + Date Code
- ✧ Material: Halogen free
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 10,000pcs

### CIRCUIT DIAGRAM



### FEATURES

- ✧ Transient protection for high-speed data lines  
IEC 61000-4-2 (ESD)  $\pm 15\text{kV}$  (Air)  
 $\pm 8\text{kV}$  (Contact)
- IEC 61000-4-4 (EFT) 40A (5/50 ns)  
Cable Discharge Event (CDE)
- ✧ Package optimized for high-speed lines
- ✧ Ultra-small package (0.6mm $\times$ 0.3mm $\times$ 0.25mm)
- ✧ Protects one data, control or power line
- ✧ Low capacitance: 0.25pF (Typical)
- ✧ Low leakage current
- ✧ Low clamping voltage
- ✧ Lead finish: NiAu


### MACHANICAL DATA

- ✧ DFN0603 package
- ✧ Flammability Rating: UL 94V-0
- ✧ Packaging: Tape and Reel
- ✧ High temperature soldering guaranteed:  $260^{\circ}\text{C}$  /10s
- ✧ Reel size: 7 inch

### APPLICATIONS

- ✧ Serial ATA
- ✧ Desktops, Servers and Notebooks
- ✧ Cellular Phones
- ✧ MDDI Ports
- ✧ USB2.0 Power and Data Line Protection
- ✧ Display Ports
- ✧ Digital Visual Interfaces (DVI)

### PIN CONFIGURATION







<b>ABSOLUTE MAXIMUM RATING</b>			
<b>Symbol</b>	<b>Parameter</b>	<b>Value</b>	<b>Units</b>
P <sub>PP</sub>	Peak Pulse Power (8/20μs)	100	W
I <sub>PP</sub>	Peak Pulse Current (8/20μs)	4.5	A
V <sub>ESD</sub>	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	±25 ±22	kV
T <sub>OPT</sub>	Operating Temperature	-55/+125	°C
T <sub>STG</sub>	Storage Temperature	-55/+150	°C


<b>ELECTRICAL CHARACTERISTICS (T<sub>amb</sub>=25° C)</b>						
<b>Symbol</b>	<b>Parameter</b>	<b>Test Condition</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Units</b>
V <sub>RWM</sub>	Reverse Working Voltage				5.0	V
V <sub>BR</sub>	Reverse Breakdown Voltage	I <sub>T</sub> = 1mA	7.0		11.0	V
I <sub>R</sub>	Reverse Leakage Current	V <sub>RWM</sub> = 5V		0.01	1.0	μA
V <sub>C</sub>	Clamping Voltage	I <sub>PP</sub> = 1A, t <sub>p</sub> = 8/20μs			12	V
V <sub>C</sub>	Clamping Voltage	I <sub>PP</sub> = 4A, t <sub>p</sub> = 8/20μs			20	V
C <sub>J</sub>	Junction Capacitance	V <sub>R</sub> = 0V, f = 1MHz		0.25	0.40	pF

# RATING AND CHARACTERISTIC CURVES (TEP0501SALC)


## ELECTRICAL CHARACTERISTICS CURVE

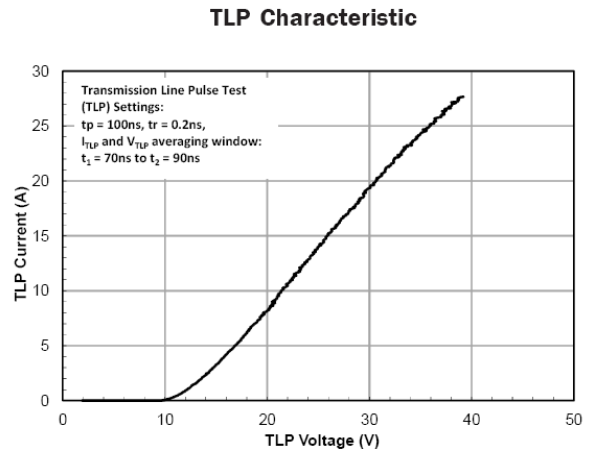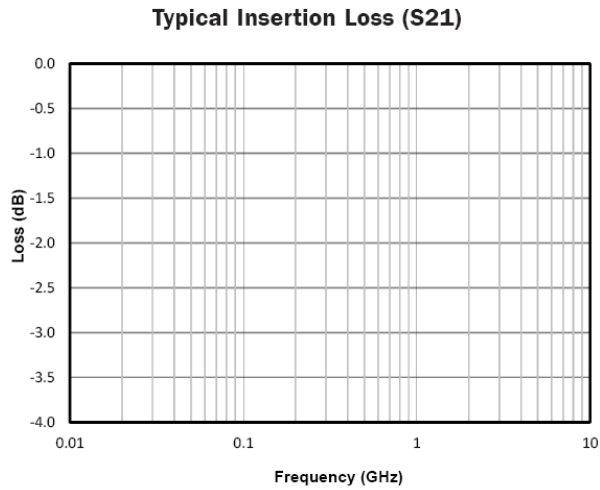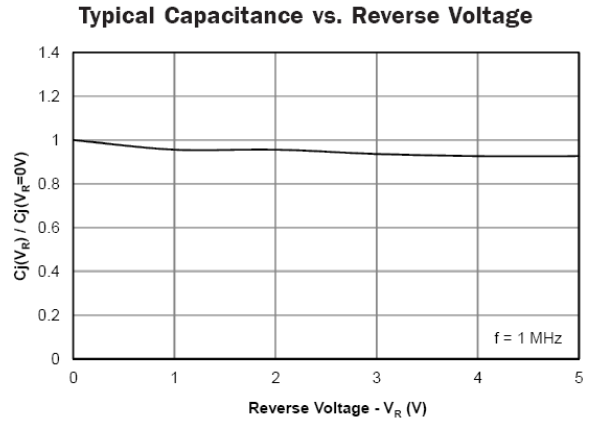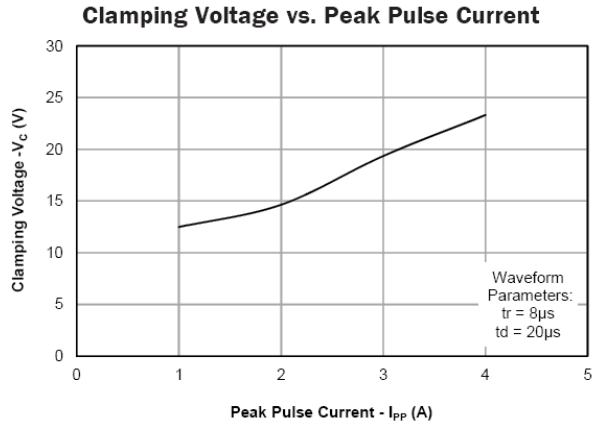


**ESD Clamping (+8kV Contact per IEC 61000-4-2)**

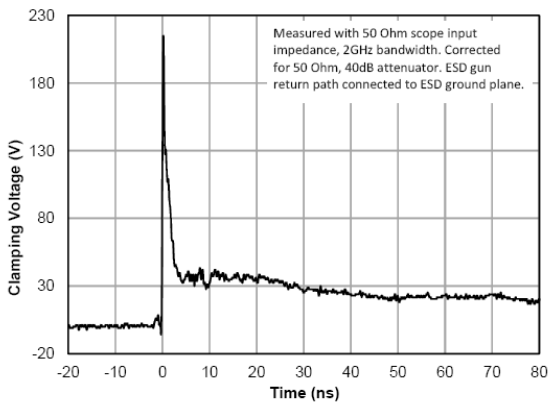

**ESD Clamping (-8kV Contact per IEC 61000-4-2)**

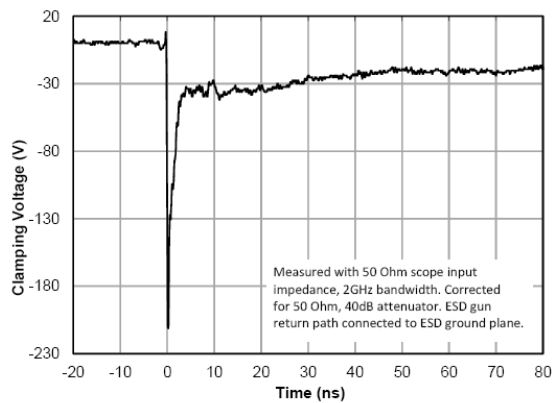


## DFN0603 PACKAGE OUTLINE DIMENSIONS

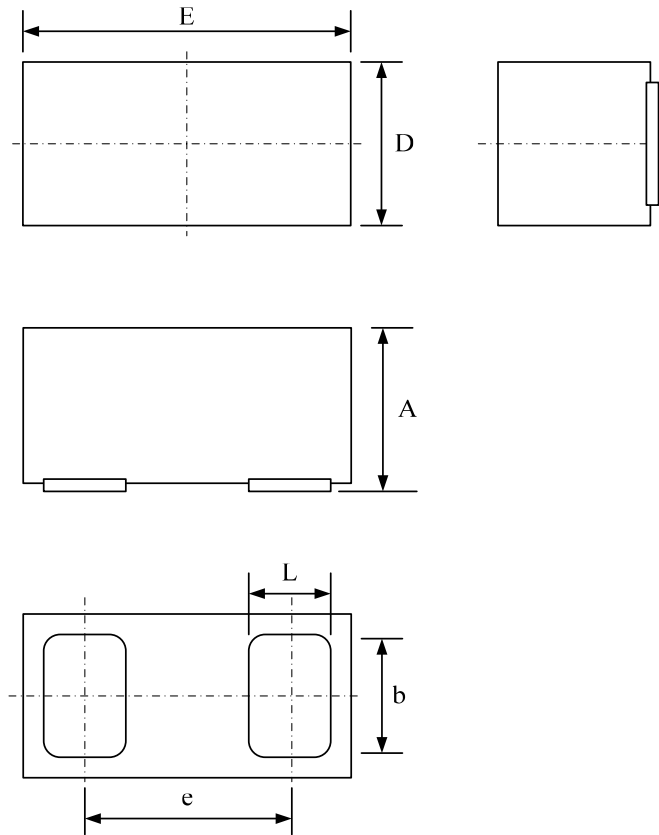

Package Dimensions (Controlling dimensions are in millimeters)

Symbol	Dimensions (mm)			Dimensions (Inches)		
	Minimum	Typical	Maximum	Minimum	Typical	Maximum
A	0.280	0.300	0.320	0.011	0.012	0.013
b	0.220	—	0.280	0.009	—	0.011
D	0.275	0.300	0.325	0.011	0.012	0.013
E	0.575	0.600	0.625	0.023	0.024	0.025
e	—	0.380	—	—	0.015	—
L	0.140	—	0.200	0.005	—	0.008


## Carrier Tape

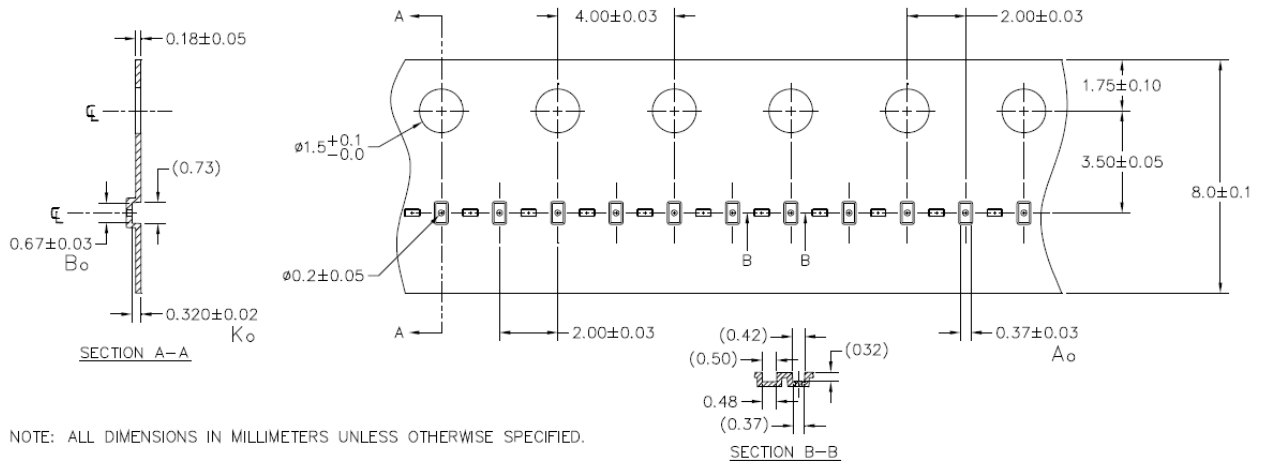

A0	B0	K0
0.37 +/-0.03	0.67 +/-0.03	0.32 +/-0.02 mm

Note: All dimensions in mm unless otherwise specified

### Device Orientation in Tape

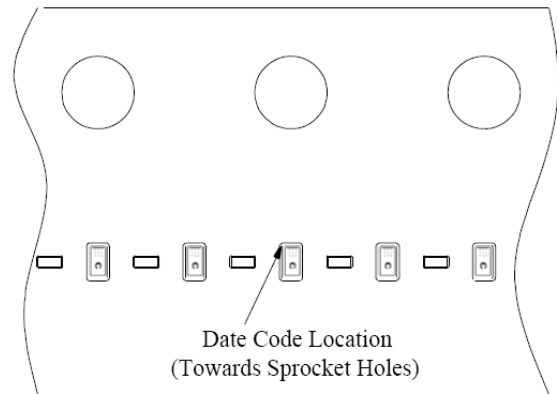

## Packing Quantity

Reel		Inner Box		Carton	
Size	Quantity Per Reel	Size	Quantity Per Reel	Size	Quantity Per Reel
7 (inch)	10,000pcs	210*208*203 (mm)	150,000pcs	440*440*230 (mm)	600,000pcs
7 (inch)	10,000pcs	183*188*80 (mm)	60,000pcs	386*265*215 (mm)	360,000pcs

## DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.